

Economical Reactors for D.C line (D.C LINE용 경제형 리액터 : 역률개선)

Economical

BHDCEAL Series




Technical Specifications

Line Voltage	220V
Operating Frequency	50/60Hz
Insulation Class	H Class
Standard	IEC, KS C

Typical Applications

Power supply cooperation of Inverters,
Harmonics reduction, Power factor improvement,
D.C line etc.

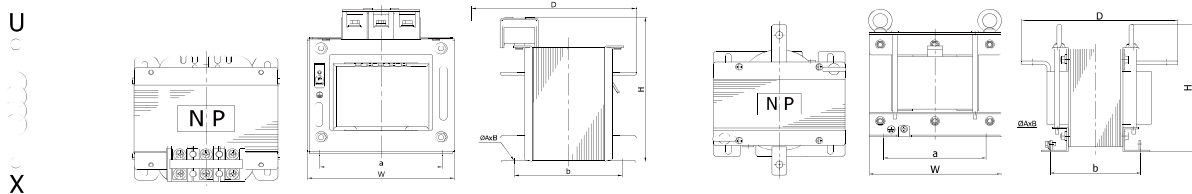

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)		Dimension (외형치수, mm)						Weight (kg)	mH/A	Shape
	Line Voltage(V)	Cap.(kW)	W	D	H	a	b	ØA×B			
BHDCEAL -0.75	220V	0.75	90	110	104	72	74	5×8	1.5	3.782/5.4	Fig.1
-1.5		1.5	90	110	104	72	74		1.6	2.22/9.2	
-2.2		2.2	96	110	115	80	71		2.3	1.57/13	
-3.7		3.7	96	110	115	80	71		2.4	1.075/19	
-5.5		5.5	110	120	121	94	85	5×10	2.9	0.704/29	
-7.5		7.5	117	130	127	96	85		3.6	0.538/38	
-11		11	138	140	149	110	88		5.1	0.365/56	
-15		15	138	160	155	110	88		5.2	0.29/71	
-18.5		18.5	156	170	166	130	105	6×10	7.8	0.22/93	Fig.2
-22		22	156	175	166	130	105		7.9	0.19/110	
-30		30	180	210	182	140	124	8×20	13	0.134/152	
-37		37	183	210	182	140	124		14	0.11/185	
-45		45	183	240	192	140	124		14	0.091/225	
-55		55	183	265	192	140	149		18	0.074/275	

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN