

REACTORS

Reactors for D.C Drive (D.C 드라이브용)

BHACAH Series



Technical Specifications

Line Voltage	220V / 380V / 400V 415V / 440V / 460V / 480V
Operating Frequency	50/60Hz
Insulation Class	H Class
Standard	IEC, KS C

Typical Applications

Power supply cooperation of Inverters etc.

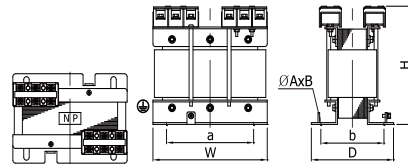

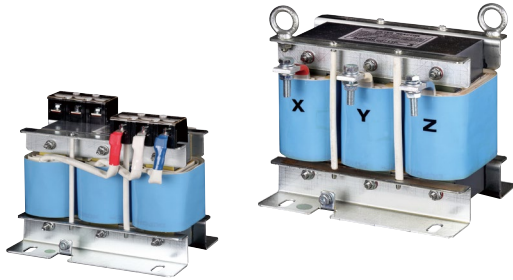


Fig.1

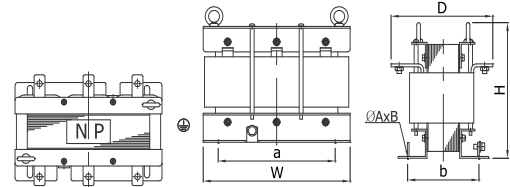


Fig.2

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)		Dimension (외형치수, mm)					Weight (kg)	Shape	
	Line Voltage(V)	uH/A	W	D	H	a	b			ØA×B
BHACAH - 10A	480V / 460V / 440V / 415V / 400V / 380V / 220V	50/10	136	130	145	97	61	6×17	2.4	Fig.1
- 20A		50/20	136	130	145	97	61		2.5	
- 40A		50/40	136	130	145	97	61		2.6	
- 50A		50/50	156	170	161	130	89		5	
- 60A		50/60	156	170	161	130	89	8×20	5.2	Fig.2
- 80A		50/80	217	149	198	160	91		7	
- 100A		50/100	217	155	198	160	96	8		
- 120A		50/120	217	174	198	160	116	12		
- 140A		50/140	217	210	198	160	141	15.5		
- 150A		50/150	217	210	198	160	141	16		
- 160A		50/160	270	220	231	215	121	17		
- 180A		50/180	270	225	231	215	126	18		
- 200A		50/200	270	239	231	215	141	23		
- 220A		50/220	270	247	231	215	146	25		
- 250A		50/250	270	245	257	215	146	10×25	28	
- 260A		50/260	270	245	257	215	146		28.5	
- 280A		50/280	270	252	258	215	151	30		
- 300A		50/300	300	243	293	215	141	34		
- 350A		50/350	330	294	301	270	176	46		
- 400A		50/400	330	304	302	270	186	50		
- 450A	50/450	360	297	336	270	176	60			
- 500A	50/500	360	307	361	270	186	70			
- 550A	50/550	360	317	362	270	196	78			
- 650A	25/650	360	291	363	270	166	57			
- 750A	25/750	360	317	363	270	191	75			
- 850A	25/850	391	317	424	330	190	95			
- 950A	25/950	391	334	426	330	205	12×30	110		
- 1000A	25/1000	391	340	427	330	210		120		

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN