



**■ Features**

- High attenuation
- Multi stage
- Dual PE system
- Light weight
- Low cost


**■ Typical Applications**

- General purpose
- Industrial equipment
- Motor drive equipments
- AVR, UPS, Inverter, Converter
- Factory automation equipment
- Three-phase electricity supply
- ACB Panel, distribution Panel


**■ Technical specifications**

Items	BTH-2060-MS	BTH-2080-MS	BTH-2100-MS	BTH-2120-MS	BTH-2150-MS	BTH-2200-MS
Rated Voltage (V <sub>R</sub> )	3 $\phi$ , 250Vac					
Operating frequency	50 / 60Hz					
Rated Currents @40°C (I <sub>R</sub> )	60A	80A	100A	120A	150A	200A
Withstanding voltage test	Line to Earth : 2,121Vdc for 1min. or 2,750Vdc for 2sec. ( BHSTD-QUA-Q201 )					
Insulation resistance	500Vdc for 1min. 300M $\Omega$ Min. ( BHSTD-QUA-Q202 )					
Leakage current	3.5mA Max. at rated voltage ( BHSTD-QUA-Q203 )					
Voltage drop	1.5V Max. ( BHSTD-QUA-Q204 )					
Temperature range	25/100/21 (-25°C to +100°C), 20~95% RH at Operating & Storage					
Designed according to	IEC/EN 60939 / UL1283 / CSA 22.2 No.8					
Weight [kg] (Max.)	5.05	5.15	5.20	5.00	5.20	5.45



**■ Circuit Diagram**

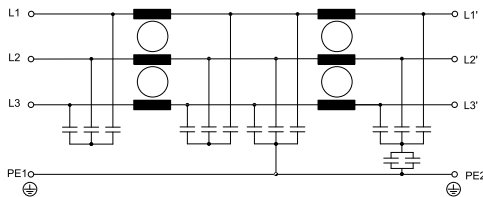

**■ Shape & Dimension (mm)**

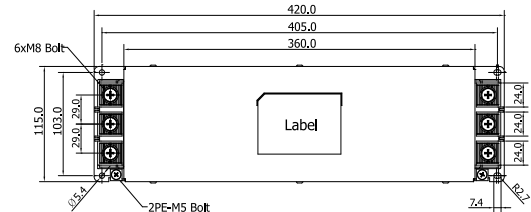

**■ Derating Curve**

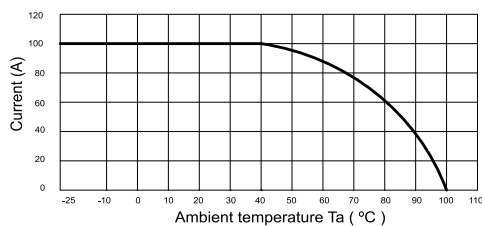

**■ Lug ring terminal**



**■ Recommended torque**

8.9 ~ 10.8 N · m