

TRANSFORMERS

1Ø Double Wind Transformers (단상 복권식 트랜스)

BHTB-DD Series






Technical Specifications

Primary Voltage	210_R220_230V
Secondary Voltage	R24_26_28_30V
Operating Frequency	50/60Hz
Insulation Class	B Class
Standard	IEC, KS C

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

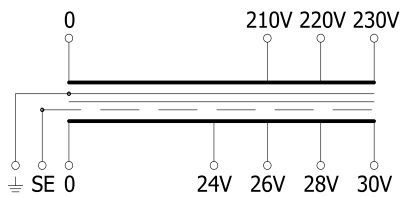

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B			
BHTB-DD40	230V 220V 210V 0	30V 28V 24V 0 SE	40	79	86	87	65	65	5×8	1.26		
-DD50			50	79	91	87	65	70		1.43		
-DD75			75	90	99	95	72	74		2.1		
-DD100			100	90	101	95	72	77		2.28		
-DD150			150	110	110	116	94	82		3.4		
-DD200			200	110	115	116	94	87		3.9		
-DD300			300	117	116	122	96	88		4.8		
-DD500		30V 28V 26V 24V 0 SE	500	138	127	142	110	94	5×10	7.08		
-DD750			750	156	148	162	130	104		6×10	10.3	
-DD1K			1k	156	157	162	130	113	11.8			
-DD1.5K			1.5k	185	155	190	160	122	8×20		16.3	
-DD2K			2k	185	174	190	160	141		19.7		

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN