


TRANSFORMERS

1Ø Double Wind Transformers (단상 복권식 트랜스)

BHTB-DK Series

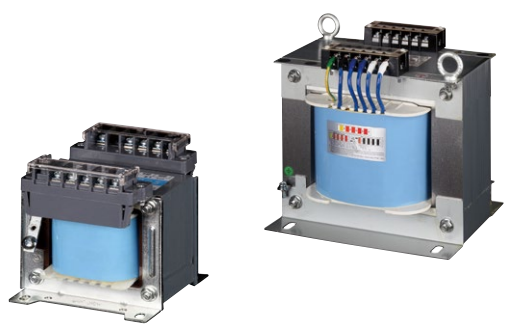

Technical Specifications

| | |
|---------------------|-----------|
| Primary Voltage | 380V |
| Secondary Voltage | 220V |
| Operating Frequency | 50/60Hz |
| Insulation Class | B Class |
| Standard | IEC, KS C |

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

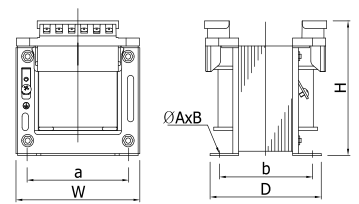
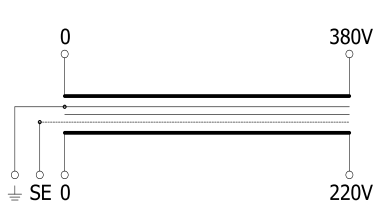


Fig. 1

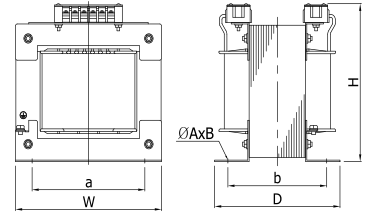


Fig. 2

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

| Type (형식명) | Specification(사양) | | | Dimension (외형치수, mm) | | | | | | Weight (kg) | Remark | Shape | |
|---------------|-------------------|-----------------|----------|----------------------|-----|-----|-----|-----|-------|----------------|--------|--------|-----------|
| | Pri.(V) | Sec.(V) | Cap.(VA) | W | D | H | a | b | ØA×B | | | | |
| BHTB -DK50 | 380V 0 SE | 220V 0 SE | 50 | 79 | 91 | 87 | 65 | 70 | 5×8 | 1.42 | | Fig. 1 | |
| -DK100 | | | 100 | 90 | 101 | 95 | 72 | 77 | | | | | |
| -DK200 | | | 200 | 110 | 115 | 116 | 94 | 87 | | | | | |
| -DK300 | | | 300 | 117 | 116 | 122 | 96 | 88 | 5×10 | 4.65 | | | |
| -DK500 | | | 500 | 138 | 129 | 139 | 110 | 94 | | 7 | | | |
| -DK750 | | | 750 | 156 | 158 | 155 | 130 | 104 | 6×10 | 9.9 | | | |
| -DK1K | | | 1k | 156 | 167 | 156 | 130 | 113 | | 11.7 | | | |
| -DK1.5K | | | 1.5k | 185 | 153 | 178 | 160 | 122 | 8×20 | 15.7 | | | |
| -DK2K | | | 2k | 185 | 173 | 178 | 160 | 141 | | 19.6 | | | |
| -DK3K | | | 3k | 220 | 189 | 218 | 170 | 149 | 10×25 | 27.7 | | | |
| -DK5K | | | 5k | 258 | 206 | 245 | 195 | 156 | | 38.7 | | | Eye Bolts |

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN