

1Ø Noise Cut Transformers (단상 NCT)

BHNCT-HR Series




Technical Specifications

Primary Voltage	208V / 220V
Secondary Voltage	208V / 220V
Operating Frequency	50/60Hz
Insulation Class	H Class
※ 1MHz → Over -80dB	

Typical Applications

- Semi-conductor manufacture, Display power equipment
- Broadcasting audio-visual devices, Medical devices
- Controller systems(PLC, Robot, DCS etc.)
- Rail network, Subway to surge influence
- Transportation network signal control etc.

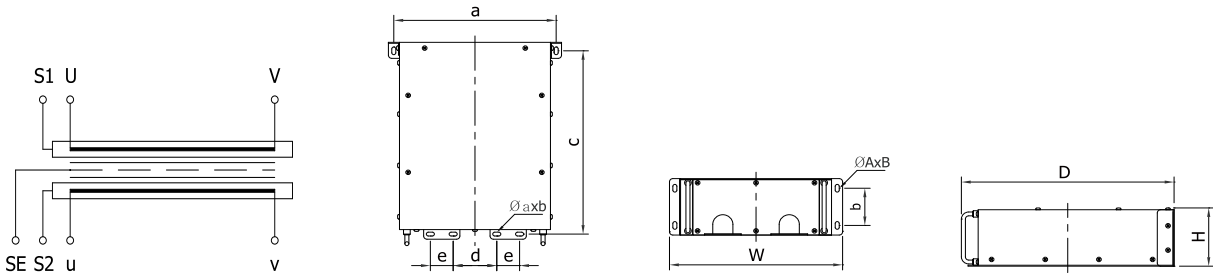

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOPU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)									Weight (kg)	
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	c	d	e	ØA×B		Øa×b
BHNCT -HR500	208V	208V	500	258	317	91	242	58	286	65	34	6×12	6×12	13.5
-HR1K			1k	310	368	138	294	92	319	76	34			
-HR2K	/	/	2k	310	368	138	294	92	319	76	34	9×15	9×17	29
-HR3K	220V	220V	3k	384	404	178	360	125	357	87	44			
-HR5K			0	0	5k	374	450	178	350	125	403	120	44	9×17

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOPU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN