

1Ø Noise Cut Transformers (단상 NCT)

BH-ITNCT Series




Technical Specifications

Primary Voltage	208V / 220V
Secondary Voltage	208V / 220V
Operating Frequency	50/60Hz
Insulation Class	H Class

※ 1MHz → Over -90dB

Typical Applications

- Semi-conductor manufacture, Display power equipment
- Broadcasting audio-visual devices, Medical devices
- Controller systems(PLC, Robot, DCS etc.)
- Rail network, Subway to surge influence
- Transportation network signal control etc.

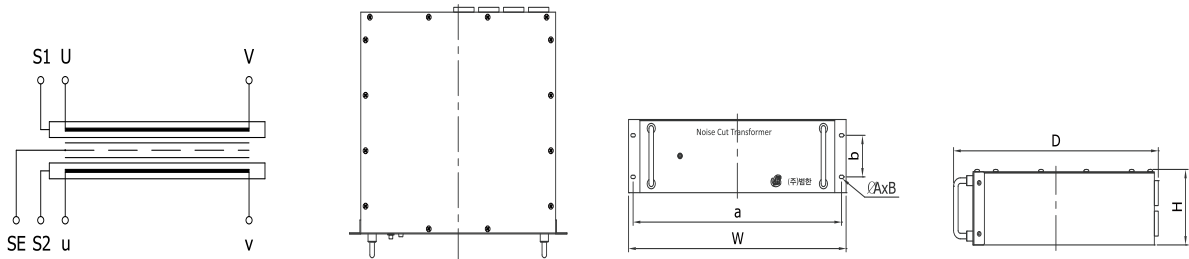

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B		
BH-ITNCT2K	208V 0	208V 0	2k	480	452	137	460	75	6×10	44	
-ITNCT3K	/ 220V	/ 220V	3k	480	463	180	460	85		66	
-ITNCT5K	0	0	5k	480	561	180	460	85		85	

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN