

3Ø Audio-Visual Noise Cut Transformers (Case Type)(삼상 AVNCT)

BHNCT-3LB Series



Munsell No RAL 7035

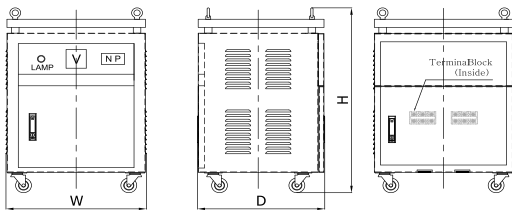



Fig.1

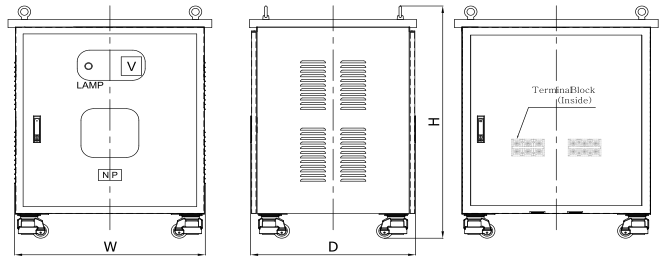


Fig.2

Technical Specifications

Primary Voltage	380V
Secondary Voltage	380y220V
Operating Frequency	50/60Hz
Insulation Class	H Class
※ 1MHz → Over -60dB	

Typical Applications

- Semi-conductor manufacture, Display power equipment
- Broadcasting audio-visual devices, Medical devices
- Controller systems(PLC, Robot, DCS etc.)
- Rail network, Subway to surge influence
- Transportation network signal control etc.

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)			Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H			
BHNCT -3LB5K	380V	380V	5k	438	396	646	75	Fig.1	
-3LB7.5K			7.5k	438	396	646	86		
-3LB10K			10k	508	456	696	103		
-3LB15K			15k	508	456	696	131		
-3LB20K			20k	558	506	797	184		
-3LB30K			30k	558	506	797	218		
-3LB50K			50k	678	576	906	292	Fig.2	
-3LB75K			75k	810	664	887	407		
-3LB100K			100k	910	764	990	486		
-3LB150K			150k	960	814	1090	663		
-3LB200K			200k	1010	864	1233	790		

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN