



■ Features

For Inverter input
 High performance
 Multi stage
 Small size
 Low cost
 Dual PE system


■ Typical Applications

AVR, UPS, Inverter, Converter
 Motor drive equipments
 Factory automation equipment
 Three-phase electricity supply
 ACB Panel, distribution Panel


■ Technical specifications

Items	BIF-5030-MS	BIF-5040-MS	BIF-5050-MS	BIF-5060-MS
Rated Voltage (V _R)	3Ø, 500Vac			
Operating frequency	50 / 60Hz			
Rated Currents @40°C (I _R)	30A	40A	50A	60A
Withstanding voltage test	Line to Earth : 2,828Vdc for 1min. or 3,650Vdc for 2sec. (BHSTD-QUA-Q201)			
Insulation resistance	500Vdc for 1min. 300MΩ Min. (BHSTD-QUA-Q202)			
Voltage drop	1.0V Max. (BHSTD-QUA-Q204)			
Temperature range	25/100/21 (-25°C to +100°C), 20~95% RH at Operating & Storage			
Designed according to	IEC/EN 60939 / UL1283 / CSA 22.2 No.8			


■ Derating Curve

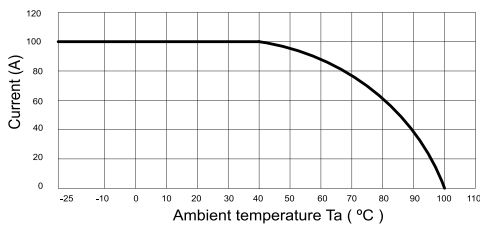

■ Shape & Dimension (mm)

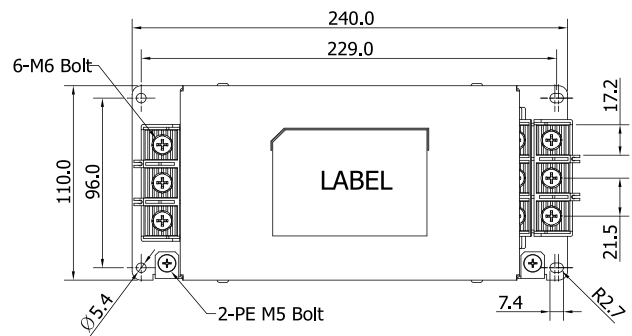

■ Lug ring terminal



■ Recommended torque

4.0 ~ 4.9 N · m

