

3Ø Double Wind Transformers (삼상 복권식 트랜스)

BH3TB & BH3BK-DA Series



Technical Specifications

Primary Voltage	R380_440V
Secondary Voltage	220V
Operating Frequency	50/60Hz
Insulation Class	B Class / H Class
Standard	IEC, KS C

Typical Applications

Control panel
Semi conductor, Display power equipment
Machinery
Heater control
etc.


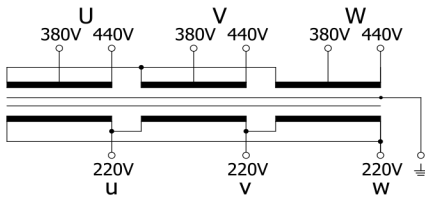


Fig.1

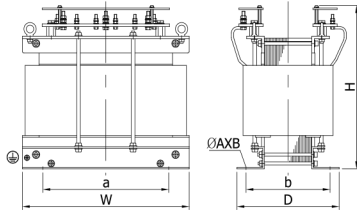


Fig.2

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOPU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B			
BH3TB-DA50	440V 380V	220V	50	97	80	96	65	45	5×10	1.31	Eye Bolts	Fig.1
-DA100			100	138	98	131	98	63	6×11	2.9		
-DA200			200	138	112	131	98	77		4.1		
-DA300			300	159	112	146	130	84		5.9		
-DA500			500	191	120	173	160	87	8×20	8.3		
-DA1K			1k	191	145	173	160	111		12.7		
-DA1.5K			1.5k	231	158	204	170	114		17.6		
-DA2K			2k	231	158	204	170	114	10×25	18.7		
-DA3K			3k	272	175	240	215	125		28.7		
-DA5K			5k	330	210	290	270	146		47.8		
-DA7.5K			7.5k	330	226	286	270	162	12×30	57.5	Eye Bolts	Fig.2
-DA10K			10k	390	218	350	330	156		76		
-DA15K			15k	390	228	350	330	166		90		
-DA20K			20k	450	238	388	380	178		121		
-DA30K			30k	452	278	388	380	218		163		
-DA40K			40k	510	350	418	425	250		218		
-DA50K			50k	550	380	461	415	270		240		
BH3BK-DA75K			75k	600	420	610	430	310		340		
-DA100K			100k	660	433	665	460	342		420		
-DA150K			150k	700	550	700	460	385		572		
-DA200K			200k	750	550	760	460	415		695		

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN