


TRANSFORMERS

3Ø Isolation Transformers (삼상 Isolation 트랜스)

BHNIT-3HC Series

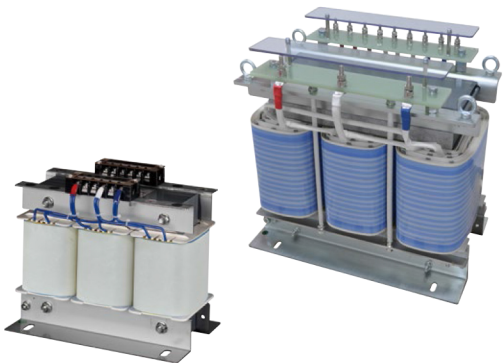

Technical Specifications

Primary Voltage	380V
Secondary Voltage	380y/220V
Operating Frequency	50/60Hz
Insulation Class	H Class
Standard	IEC, KS C

Typical Applications

Control panel
Semi conductor, Display power equipment
Machinery
Heater control
etc.


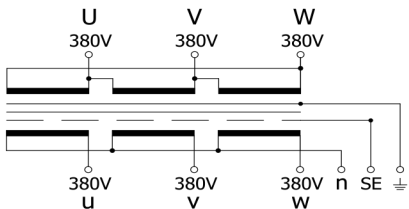


Fig.1

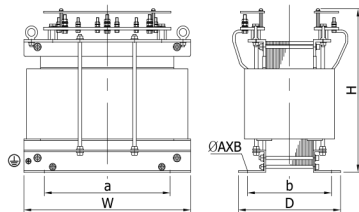


Fig.2

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B			
BHNIT -3HC100	380V	380V SE	100	159	112	146	130	84	8×20	6		Fig.1
-3HC300			300	191	120	173	160	87		9.1		
-3HC500			500	191	145	173	160	111		13		
-3HC1K			1k	231	158	204	170	114		18.7		
-3HC2K			2k	272	175	241	215	125	10×25	28.8		Fig.1
-3HC3K			3k	330	210	290	270	146		48		
-3HC5K			5k	330	226	286	270	162		58		
-3HC7.5K			7.5k	390	209	346	330	148		76		
-3HC10K			10k	390	248	350	330	187	12×30	98		Fig.2
-3HC20K			20k	451	332	430	380	228		146		
-3HC30K			30k	500	350	470	425	250		218		
-3HC50K			50k	600	420	610	430	310		335		
-3HC75K			75k	660	440	670	460	345		380		
-3HC100K			100k	660	470	670	460	360		460		

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN