

TRANSFORMERS

1Ø Double Wind Transformers (단상 복권식 트랜스)

BHTB-DP Series






Technical Specifications

Primary Voltage	220_R380_420_440_460V
Secondary Voltage	0_220V(S1) 0_24_26V(S2)
Operating Frequency	50/60Hz
Insulation Class	B Class
Standard	IEC, KS C

Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

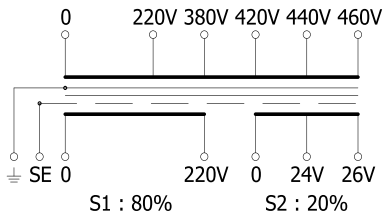

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØA×B			
BHTB - DP50			50	79	91	87	65	70	5×8	1.43		
- DP75	460V 440V	24V 0	75	90	99	95	72	74		2.08		
- DP100	380V	220V 0 SE	100	90	101	95	72	77		2.25		
- DP200	220V 0		200	110	115	116	94	87		3.82		
- DP300			300	117	116	122	96	88	5×10	4.6		
- DP500	460V 440V 420V	26V 24V 0	500	138	129	139	110	94		7.03		
- DP1K			1k	156	167	156	130	113	6×10	11.5		
- DP1.5K	380V 220V	220V 0 SE	1.5k	185	153	178	160	122		8×20	15.9	
- DP2K	0		2k	185	173	178	160	141	20			

TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN ● WE MAKE FOR YOU ● TO THE WORLD BUMHAN