

TRANSFORMERS

3Ø Double Wind Transformers (Case Type)(삼상 복권 외함식)

BH3CS-DA Series



Munsell No RAL 7035

Technical Specifications

Primary Voltage	R380_440V
Secondary Voltage	220V
Operating Frequency	50/60Hz
Insulation Class	B Class / H Class
Standard	IEC, KS C

Typical Applications

- Semi conductor, Display power equipment
- Machinery
- Power supply etc.

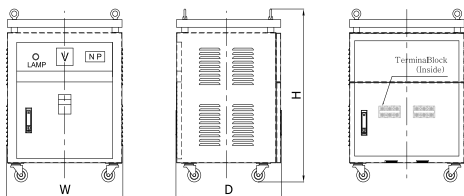
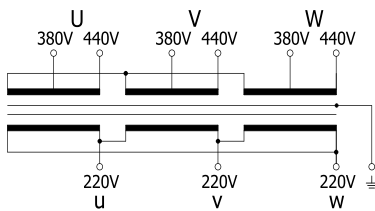


Fig.1

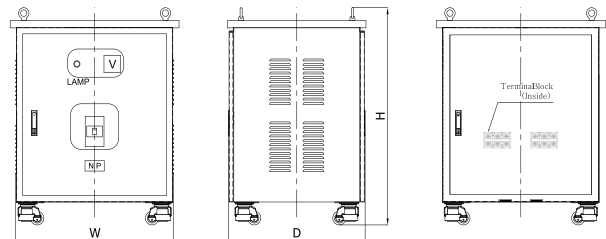


Fig.2

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)			Weight (kg)	Remark	Shape
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H			
BH3CS -DA5K	440V 380V	220V	5k	438	396	646	75	Fig.1	
-DA7.5K			7.5k	438	396	646	86		
-DA10K			10k	508	456	696	103		
-DA15K			15k	508	456	696	131		
-DA20K			20k	558	506	797	184		
-DA30K			30k	558	506	797	218		
-DA40K			40K	628	506	897	260		
-DA50K			50k	678	576	906	292		
-DA75K			75k	810	664	887	407	Fig.2	
-DA100K			100k	910	764	990	486		
-DA150K			150k	960	814	1090	663		
-DA200K			200k	1010	864	1233	790		

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN