

# TRANSFORMERS

## 1Ø UL(UL 5085)Certified Transformers(단상 UL 트랜스)

E529977

### BHTB-HQ UL Series




#### Technical Specifications

Primary Voltage	380 or 400 or 415 or 440 or 460 or 480
Secondary Voltage	200 or 208 or 220 or 230 or 240
Operating Frequency	50 or 60Hz
Insulation Class	H Class
Standard	UL 5085 - 1/2

#### Typical Applications

- Control panel
- Semi conductor, Display power equipment
- Machinery
- Heater control
- etc.

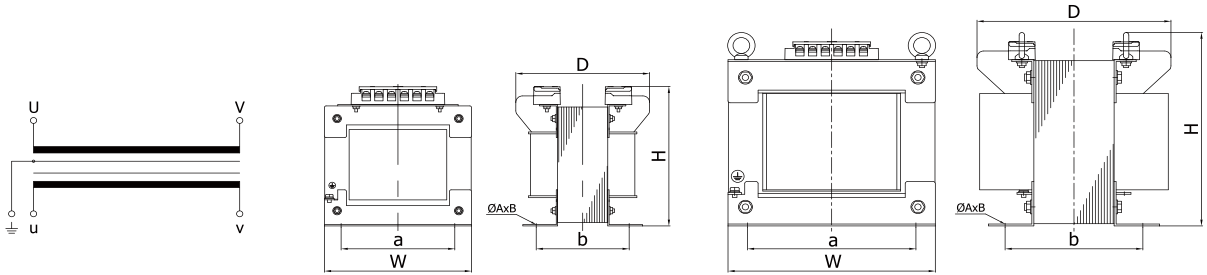

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN

#### Selection Table

Type (형식명)	Specification(사양)			Dimension (외형치수, mm)						Weight (kg)	Remark
	Pri.(V)	Sec.(V)	Cap.(VA)	W	D	H	a	b	ØAxB		
BHTB-HQ100UL	380 or 400 or 415 or 440 or 460 or 480	200 or 208 or 220 or 230 or 240	100VA	110	130	115	94	87	5×8	3.8	
BHTB-HQ200UL			200VA	117	135	121	96	88	5×10	4.7	
BHTB-HQ300UL			300VA	138	140	138	110	89	5×10	6.8	
BHTB-HQ500UL			500VA	156	170	162	130	104	6×10	10	
BHTB-HQ750UL			750VA	182	180	184	160	118	6×10	15	
BHTB-HQ1KUL			1KVA	182	180	184	160	118	8×20	16	
BHTB-HQ1.5KUL			1.5KVA	182	200	184	160	138	8×20	20	
BHTB-HQ2KUL			2KVA	220	205	220	170	139	8×20	25	
BHTB-HQ3KUL			3KVA	251	230	245	195	157	10×25	39	Eye Bolts
BHTB-HQ5KUL			5KVA	270	250	265	220	174	10×25	50	
BHTB-HQ7.5KUL			7.5KVA	310	300	310	252	206	13×30	79	
BHTB-HQ10KUL			10KVA	310	340	310	252	236	13×30	100	Eye Bolts 60Hz
BHTB-HQ15KUL			15KVA	355	330	340	250	238	12×30	125	
BHTB-HQ20KUL			20KVA	355	360	340	250	268	12×30	150	
BHTB-HQ30KUL			30KVA	360	440	495	230	228	12×30	180	

TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN • WE MAKE FOR YOU • TO THE WORLD BUMHAN